


GENERAL NOTES

1. BANK SAND SHALL BE SP, SW OR SM PER USC (ASTM D2487 AND SHALL HAVE THE FOLLOWING PROPERTIES: LESS THAN 15% PASSING #200 SIEVE; LESS THAN 2% CLAY LUMPS; PLASTICITY INDEX LESS THAN 7; LIQUID LIMIT LESS THAN 25.

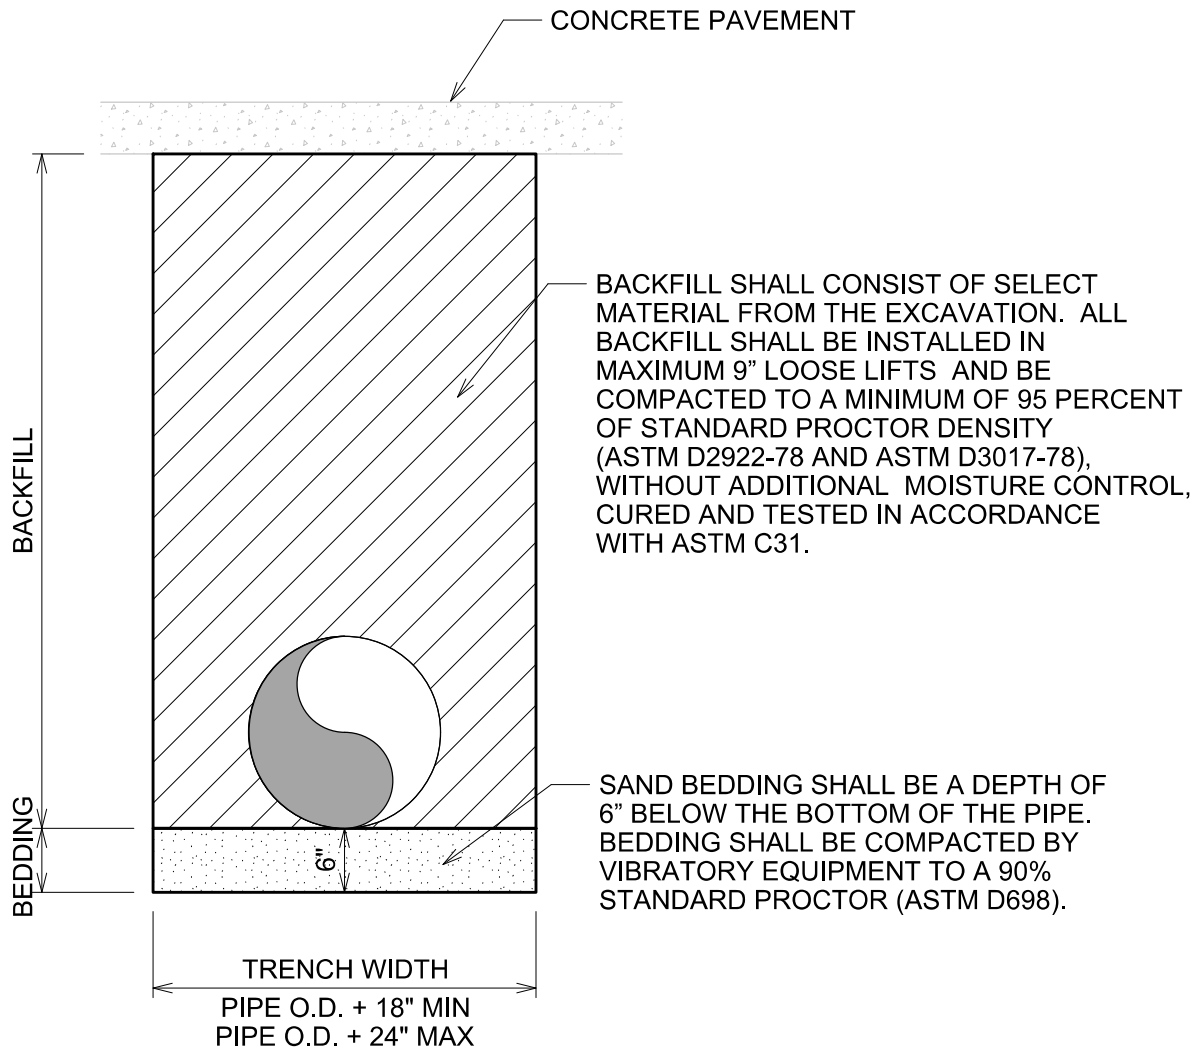

**STORM SEWER
BEDDING & BACKFILL
FOR RCP PIPE
(CONCRETE PAVED AREAS)**

STANDARD CONSTRUCTION DETAILS

DATE: 07/20/21

REVISED
DATE: 07/20/21

BBF - 5